



VL-621







VL-1220




SPECIFICATIONS	
Name	VL-621
Nominal voltage (V)	3
Nominal capacity (mAh)	1.5
Continuous drain (mA)	0.01
Operating temperature (°C)	-20 to +60
Weight (g)	0.3

SPECIFICATIONS	
Name	VL-1220
Nominal voltage (V)	3
Nominal capacity (mAh)	7.0
Continuous drain (mA)	0.02
Operating temperature (°C)	-20 to +60
Weight (g)	0.8

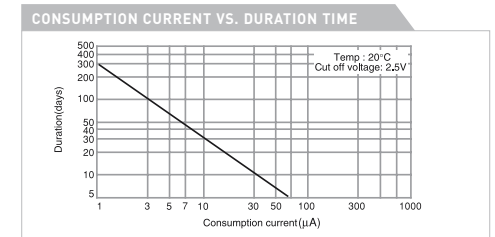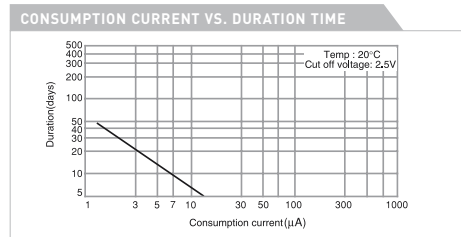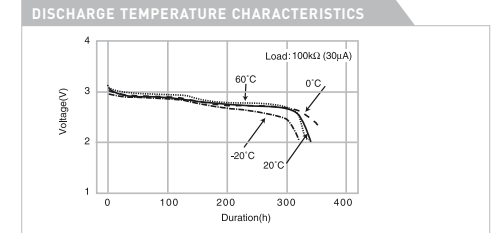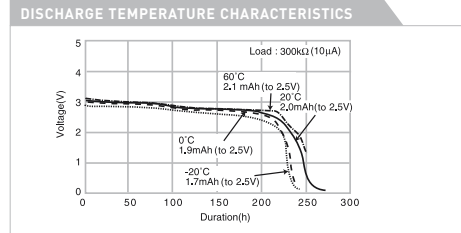


VL-2020




SPECIFICATIONS

Name	VL-2020
Nominal voltage (V)	3
Nominal capacity (mAh)	20.0
Continuous drain (mA)	0.07
Operating temperature (°C)	-20 to +60
Weight (g)	2.2


DISCHARGE TEMPERATURE CHARACTERISTICS



CONSUMPTION CURRENT VS. DURATION TIME

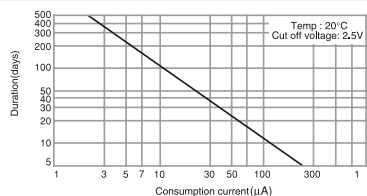


VL-2320




SPECIFICATIONS

Name	VL-2320
Nominal voltage (V)	3
Nominal capacity (mAh)	30.0
Continuous drain (mA)	0.1
Operating temperature (°C)	-20 to +60
Weight (g)	2.7


DISCHARGE TEMPERATURE CHARACTERISTICS



CONSUMPTION CURRENT VS. DURATION TIME

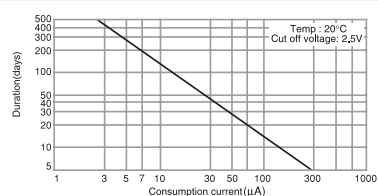


VL-2330




SPECIFICATIONS

Name	VL-2330
Nominal voltage (V)	3
Nominal capacity (mAh)	50.0
Continuous drain (mA)	0.1
Operating temperature (°C)	-20 to +60
Weight (g)	3.5


DISCHARGE TEMPERATURE CHARACTERISTICS



CONSUMPTION CURRENT VS. DURATION TIME

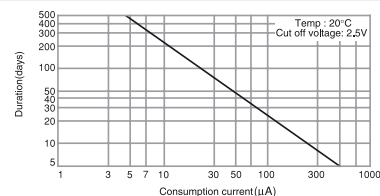


VL-3032




SPECIFICATIONS

Name	VL-3032
Nominal voltage (V)	3
Nominal capacity (mAh)	100.0
Continuous drain (mA)	0.2
Operating temperature (°C)	-20 to +60
Weight (g)	6.2

DISCHARGE TEMPERATURE CHARACTERISTICS



CONSUMPTION CURRENT VS. DURATION TIME

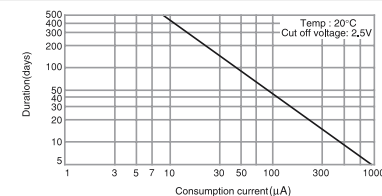

CYCLE LIFE (VL SERIES)

