

IP Recorder NVR-4408P8-H1/F



4000 VSS
IP

FUNCTIONS



VCA
ANALYSIS

4K HDMI

H.265

8
Mpx

128 Mb/s
Stream

x8
V+A

240 fps
REC


x2
Monitor

x1
HDD

KEY FEATURES

- 8 x Ethernet PoE - RJ-45 interface, 10/100 Mbit/s
- Video and audio channels: 8
- Supported protocols: ONVIF
- Recording speed up to 240 fps at 3840 x 2160
- Recorded stream size: 128 Mb/s in total from all cameras
- Internal HDDs mount: 1
- Monitor outputs: 2 (HDMI (4K UltraHD), VGA)
- Face recognition

DIMENSIONS

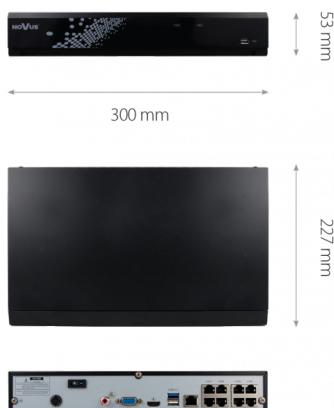

Video	
IP Cameras	up to 8 channels at 3840 x 2160 resolution (video + audio)
Maximum Supported Camera Resolution	3840 x 2160 3000 x 3000 for fisheye cameras
Compression	H.264, H.265
Monitor Output	main (split screen, full screen, sequence): 1 x VGA, 1 x HDMI (4K UltraHD) (up to 2 monitors simultaneously)
Dualstreaming Support	yes
Fisheye Support	yes, 2000/4000 IP series cameras
Audio	
Audio Output	1 x line-out (RCA) 1 x HDMI
Recording	
Recording Speed	240 fps (8 x 30 fps for 3840 x 2160 and lower)
Stream Size	128 Mb/s in total from all cameras
Recording Mode	time-lapse, triggered by: manual, alarm input, motion detection, intelligent image analysis functions, PIR alarm
Prealarm/Postalarm	up to 3 s/up to 600 s
Display	
Display Speed	240 fps (8 x 30 fps)
Playback	
Playback Speed	240 fps (8 x 30 fps)
Recorded Data Search	by date/time, events, image analysis events, motion in a defined area, related to face recognition, tags
Backup	
Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	JPG, BMP, PNG, MP4, AVI, RF
Storage	
Internal Storage	available mount: 1 x HDD 3.5" 14 TB SATA
Total Internal Capacity	14 TB
Alarm	
Camera Alarm Input/Output	supports camera's alarm input/output
System Reaction to Alarm Events	buzzer, e-mail, screen message, recording activation, PTZ, Full Screen, FTP picture upload, FTP video upload, picture to Cloud, video to Cloud
Intelligent image analysis	
Supported Functions	Exception, Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Face Detection, Pedestrian Detection, Cross Counting, Face Recognition, Sound detection
Network	
Network Interface	1 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s 8 x Ethernet PoE - RJ-45 interface, 10/100 Mbit/s with Extended mode
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, SMTP, P2P
PC/MAC Software	NMS, Internet Explorer, NHDR-5000 Viewer/NHDR-5000 Viewer
Mobile applications	RxCamView (iPhone, Android)
Number of Simultaneous Connections	up to 40 clients
Bandwidth	128 Mb/s in total to all client workstations
PTZ	
PTZ Functions	pan/tilt/zoom, preset commands, patterns
Auxiliary Interfaces	
USB Ports	1 x USB 3.0, 2 x USB 2.0
Operating system	
Operating System	Linux
OSD	languages: Polish, English, others
Control	PC mouse and IR remote controller (in-set included), network
System Diagnostic	automatic control of: HDDs, network, camera connection loss
Security	password protection, IP filtering
Installation parameters	
Dimensions (mm)	300 (W) x 53 (H) x 227 (D)
Weight	1.1 kg (without HDD)
Power Supply	48 VDC (100 ~ 240 VAC/48 VDC PSU in-set included)
Power Consumption	20 W (with 1 HDD) + 72 W PoE
Operating Temperature	-10°C ~ 45°C

Intelligent image analysis, dualstream mode, PTZ control, motion detection and alarm inputs / outputs functions depends on the functionality of the camera and the capabilities of the communication protocol. The recorder is dedicated to work with Novus 2000 and 4000 series IP cameras and achieves the best functionality with them. Detailed data on camera compatibility with recorders and compatible hard drives can be found in the compatibility tables available in the DOWNLOADABLE FILES tab. Display and playback speeds are achieved using dual stream. One of the functions: Fisheye Support, Face Recognition can be switched on at the same time.